


E2000 Patch Cord

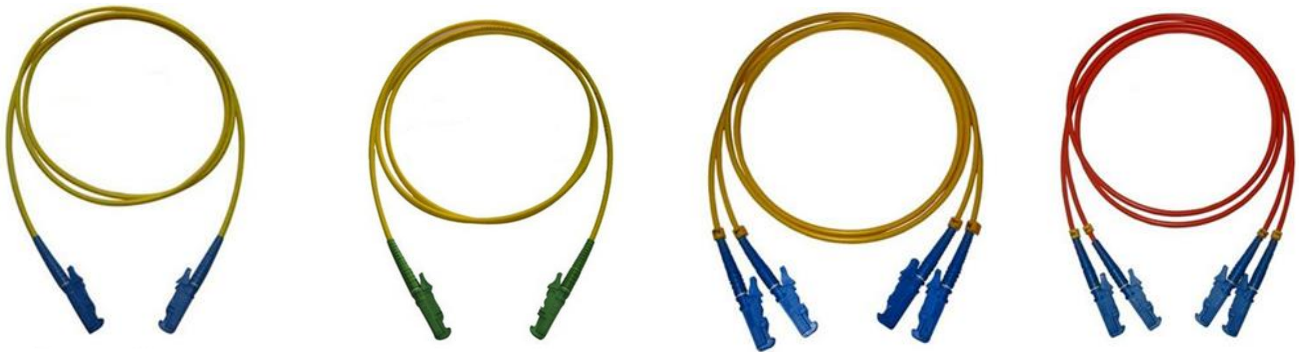

APPLICATIONS		
CATV, and Multimedia	Active device termination	Industrial and medical
Telecommunication networks	Data processing networks	Premise installations
Sensor system	Interconnection for O/E modules	

FEATURES

- Low insertion loss and back reflection loss
- Good exchangeability
- Good Durability
- High temperature stability
- Standard: EN 186-270

SPECIFICATIONS

	Single mode	Multimode
Insertion Loss	Typical ≤ 0.2 dB, Maximum ≤ 0.3 dB	≤ 0.25 dB
Return Loss	≥ 50 dB (PC) ≥ 65 dB (APC)	
Repeatability	≤ 0.1	
Durability	≤ 0.2 dB typical change, 1000 matings	
Interchangeability	≤ 0.2 dB	
Tensile strength	> 70 N	
Operating Temperature	-40 to + 85 °C	-40 to + 85 °C

ORDERING OPTIONS

Connector Color	Boot (cable) Size	Boot Color	Fiber Type	Cable number	Application	Length
Beige	0.9 mm	Beige	9/125 μ m (SM)	Simplex	PC	Customized
Blue	2.0 mm	Black	50/125 μ m (MM)	Duplex	APC	
Green	3.0 mm	Blue	62.5/125 μ m (MM)			
		Green				
		Red				