

# BARE FIBER ADAPTER

## CHARACTERISTICS

- PC type various receptacle type
- High stability
- Easy to operate
- Repeated use




## PARAMETERS


- Ferrule ID:  $\phi 0.1255 / \phi 0.1260$
- Insertion Loss:  $\leq 1\text{dB}$  Nickel plated brass body
- Repeatability:  $\leq 0.2\text{dB}$  Compact design
- Life times:  $\geq 1000$

## CONNECTION LOSS

- Connected to SM connector

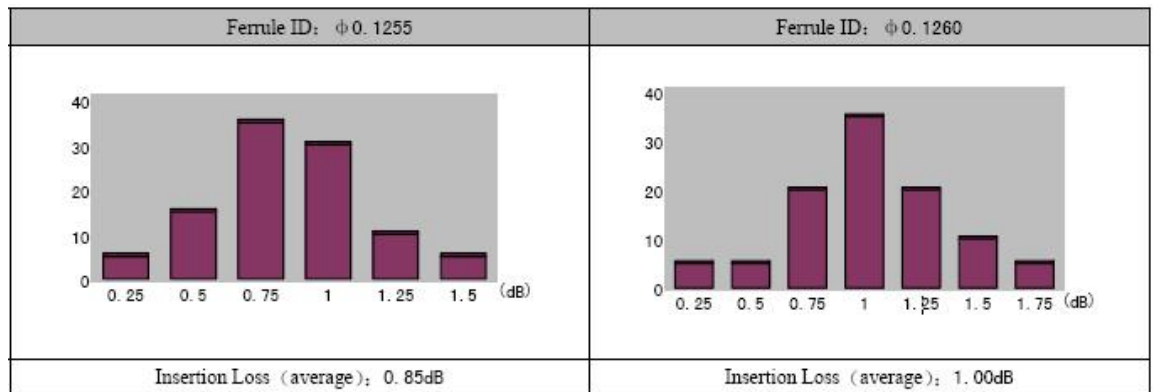

- Connected to bare fiber adapter

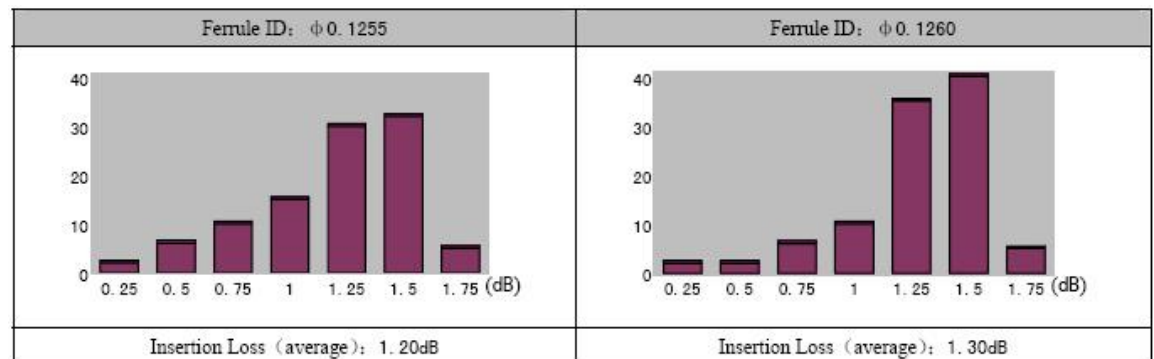

- Connected to optical power meter: No loss.